



TEST OUR METAL®

Job: _____

Item No. _____

Correction Series Insulated Tray and Beverage Delivery Cabinet

Model
CCJ-80-COR

Insulated tray and beverage delivery cart specifically designed for the correctional market.


- Stainless steel interior and exterior exterior cabinet
- Vertical and horizontal internal welded 1 1/2" x 1 1/2" angle steel frame insures strength and durability while transporting internally or outside correctional facilities
- Door hinges are double thick stainless steel with 5/8" diameter pins; eliminates wear and insures door security
- Full perimeter door gasket to maintain temperature and eliminate heat loss
- Stainless steel transport latches with padlock provision to insure maximum security
- Recessed push handles with 1" diameter stainless steel tubing welded in place for maximum strength and minimum damage
- Capacity of 64 insulated covered trays (stacked) or, if required stainless steel tray slides can be welded in place for non-insulated tray delivery
- Perimeter bumper standard to protect from damage during transport
- Heavy duty 8" semi pneumatic casters; two swivel, two rigid for maneuverability



Made in USA

451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158
Toll Free 800-733-8073 • Local 317-831-7030 • Fax 317-831-7036
www.secoselect.com

MODEL #	TRAYS	PAN SIZE	WIDTH DIM A	DEPTH DIM B	HEIGHT DIM C	SHIP WEIGHT
CMP-CCJ-80	60-80	15" X 13-1/2" X 2-3/4"	61 3/4"	35 1/2"	54"	540

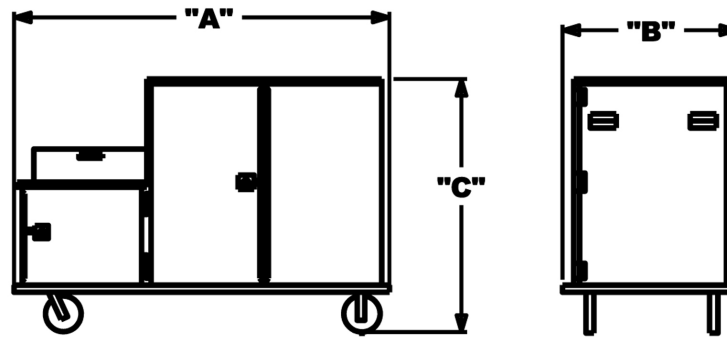

GENERAL: Cabinet shall be all double wall construction insulated with high density fiberglass. Cabinet shall have stainless steel interior and exterior. Exterior shall be polished to a number four finish.

INTERNAL CABINET: Cabinet shall have a heavy-duty full body frame. All vertical and horizontal interior edges shall be framed with 1 1/2" X 1 1/2" 1/8" angle steel. Frame shall be fully arc welded, cross braced, and reinforced at all corners.

BASE FRAME: 1/8" formed steel base. Base shall have four 6" x 6" x 5/16" steel plates drilled and tapped to accommodate 5", 6" or 8" casters. The plates are fully welded to frame on all four sides.

INNER CABINET: Inner cabinet shall be 20 gauge 300 series stainless steel. Inner cabinet fully insulated with high density fiberglass. Cabinet shall have tamper proof fasteners throughout. Cabinet shall have three inner cabinets, each with its own door. Cabinet shall accommodate 60 to 80 (varies with tray sizes) self insulated stackable inmate trays.

EXTERIOR TOPS: Over the smaller compartment there shall be a 14 gauge stainless steel wrap to accommodate two 5 gallon drink dispensers.

DOORS: Doors shall be 18 gauge stainless steel. Doors shall be fully framed with 3/4" x 3/4" 16 gauge angle steel. Frame shall be fully welded. Doors shall be fully insulated and gasketed. All door hardware secured to internal frame of cabinet and door. Each door shall have a 12 gauge transport latch that will accept a padlock. Doors shall be hinged with 12 gauge stainless steel continuous welded hinges. There shall be three 6" hinges for the larger doors and two for the smaller door.

CASTER / BUMPER / PUSH HANDLES: Cabinet shall come complete with 4 heavy-duty 8" casters. Two rigid and two swivel with brakes. Bumper frame shall be 1/8" formed aluminum plate, with bumper channels welded and riveted to bumper frame. Bumper frame is secured to bottom of the cabinet with 5/16" screws. Cabinet shall have one recessed stainless steel push handle mounted on the end of cart with the swivel casters.

Accessories, Options, Variations

Heated / Ambient / or Combination

- Rails to accommodate non-insulated , non-stackable trays
- Available to hold any size tray
- Doors hinged right side only
- Doors hinged left side only



TEST OUR METAL®

451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158
800-733-8073 • Local 317-831-7030 • Fax 317-831-7036
www.secoselect.com

REV 2016-12